


JMCG Facts

The only commercial vehicle company establishing joint-ventures with 2 of Fortune Global 500 enterprises in China (Ford, Isuzu)
Over 5 decades of experience in manufacturing vehicles



Jiangxi Jiangling Motors Import & Export Co., Ltd.
Add: 969, Jinrong Street, Honggutan District, Nanchang, Jiangxi, China
Tel: +86-791-86738769 Fax: +86-791-86738577
Website: www.jmcg-global.com

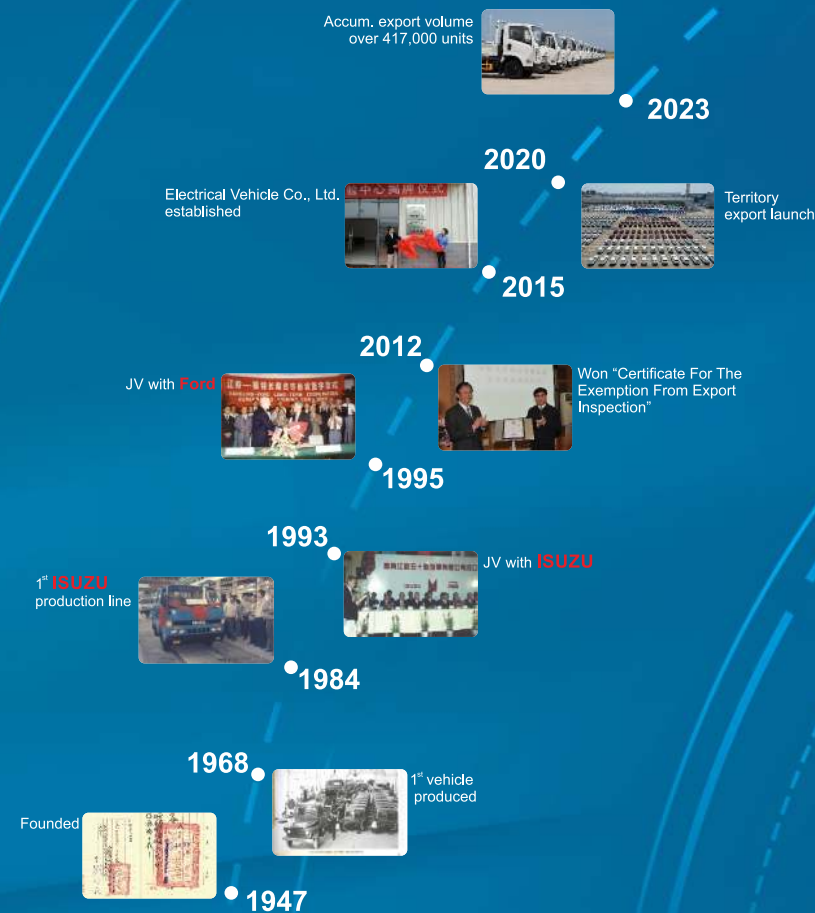

No.1 Light bus share
No.1 Ambulance share
Top 2 Pickup share
Top 5 Light truck share

— ALL NEW — CARRYING PLUS



JMC
f JMCGMotors


POWERTRAIN



JX493 2.8L 4-cylinder

Max. power, 90kW

Max. Torque, 330N·m /1400-2500r/min

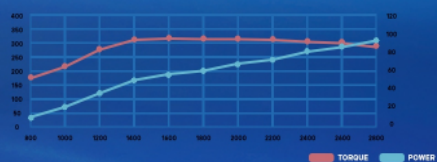


JX4D30 2.9L 4-cylinder

Max. power 120kW Max. torque 450N·m

Torque 350Nm at 1000 rpm

Garrett's 4th generation turbocharger

HT300 cylinder material with a life expectancy of 700,000 km

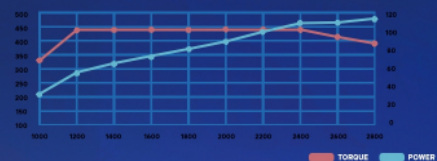

RIGOROUS TESTING

Leading-edge manufacturing processes to ensure the manufacturing quality of our products

JMC-Ford development process.

The agile and robust development process and strict verification standards have established the excellent quality standard of JMC light trucks

28 ITEMS Full range of road conditions, including twists, potholes, rocky roads, splash pads and more. Specialised test conditions.



5000+
items Component level
verification tests



400+
items Complete
vehicle level verification tests



100+
items Complete vehicle
road verification,
2 times the industry level.



3000
System level test cases



3Million
kilometers of proven mileage
which could circle the earth 70 times



13%
Mountain test mileage exceeds
industry standards



27%
bad road test mileage



1million
kilometers complete vehicle durability
verification test 10-15% rougher road
condition than competitors



9600+
times gear shafting
verification test

INTERIOR

ERGONOMIC DESIGN


- New driver-centric interior hugging dashboard design
Flat cabin design with improved the inner space
- 17 storage areas for infinite space extension & USB and 12V power interface
- Reversible handbrake providing a flexible inner space
- Standard with power windows
- Ergonomic seats with 5-level adjustment armrest
- Multifunctional steering wheel



USB for vehicle recorder



Center USB

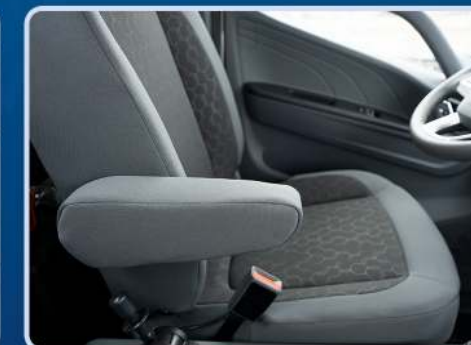

LOAD-BEARING

- **STRAIGHT THROUGH BEAM DESIGN:**

Frame section height—180mm

- **FRONT AXLE:**

Made of high-strength alloy steel

For higher strength and load-bearing capacity

- **QSTE650TM FRAME:**





The strongest ultra-high strength steel in the industry

- **MODIFICATION FLEXIBILITY:**

Standard hole design

More convenient to install special vehicle modification accessories

UPGRADE CABIN WIDTH

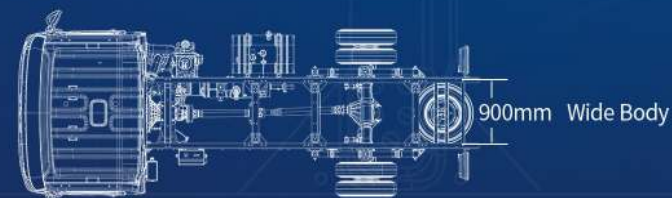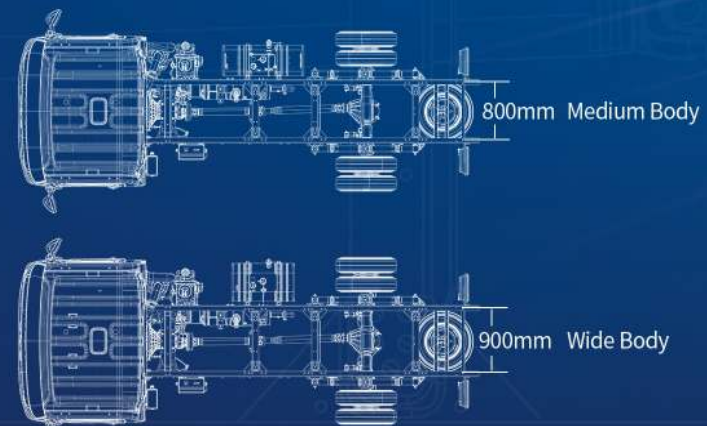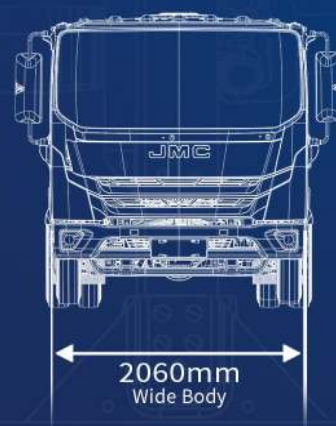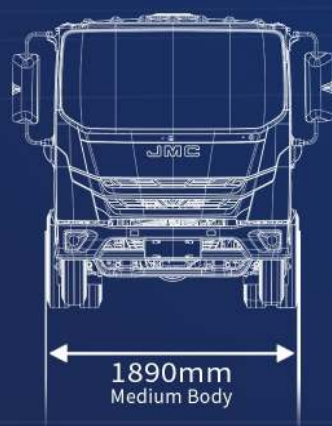

ENERGY CONSERVATION

-  0.45 air resistance coefficient
-  0.0065 rolling resistance tires
-  1800 bar high pressure fuel system



SECURITY



- 1 Hydraulic brake reaches the level of air brake(Air brake optional)
- 2 Wide wheelbase, wide leaf spring distance, Widest 900 mm frame in its class (wide body model)
- 3 4.38° A-pillar obstacle angle for less blind spot, more open view, safer driving

Model	All New Carrying Plus															
Cabin type	SC/KC/DC				SC/DC				SC/KC		SC		SC/KC	SC		
Emission standard	E2	E4	E5	E6	E2	E4	E5	E6	E2	E4	E5	E6	E4	E5	E6	
Dimension																
Wheelbase(mm)	2850								3360							
Cabin width(mm)	1890				1890				2060							
Overall Dimension Cargo body L*W*H(mm)	SC/KC: 5490*2080*2435/2450 DC: 5490*2080*2450/2465				SC: 5990*2080*2425/2435 DC: 5990*2080*2435/2450				5990*2180*2445/2465				5990*2180*2445/2465			
Cargo size L*H(mm)	SC: 3700*440 KC: 3300*440 DC: 2700*440				SC: 4200*440 DC: 3200*440				SC: 4200*440 KC: 3800*440							
Powertrain																
Engine	JX493												JX4D30			
Displacement(cc)	2771												2892			
Max.Output(kw)/Rpm	68/3600		90/3200		68/3600		90/3200		68/3600		90/3200		120/2800			
Max.Torque(Nm)/Rpm	220/1800-2200		330/1600-2200		220/1800-2200		330/1600-2200		220/1800-2200		330/1600-2200		450/1200-2400			
Gearbox Type	5MT												6MT			
Fuel Tank Capacity (L)	64				100				120				120			
Rear axle speed ratio	6.142		5.571		6.142		5.571		6.142		5.571		4.222			
Brake&Tire																
Brake type	Hydraulic								Hydraulic/Air	Hydraulic	Hydraulic/Air			Air		
Tire type	Single Rear Tire/Dual Rear Tires								Dual Rear Tires							
Tire size	Single Rear Tire: 7.0R16 14PR Dual Rear Tires: 7.0R16 10PR			Single Rear Tire: 7.0R16 14PR 205/75 R17.5 Dual Rear Tires: 7.0R16 10PR	7.0R16 10PR			7.0R16 10PR 205/75 R17.5	7.0R16 10PR			7.0R16 10PR 215/75 R17.5		Standard: 7.0R16 10PR Optional: 7.5R16 16PR		Standard: 7.0R16 10PR 215/75 R17.5 Optional: 7.5R16 16PR
Weight																
Kerb weight(kg)	Single Rear Tire: 2265/2280/2400 Dual Rear Tires: 2315/2375/2465	Single Rear Tire: 2305/2325/2440 Dual Rear Tires: 2355/2415/2505	Single Rear Tire: 2340/2355/2475 Dual Rear Tires: 2405/2445/2540	Single Rear Tire: 2345/2360/2480 Dual Rear Tires: 2410/2450/2545	2420/2495	2460/2535	2495/2570	Hydraulic brake: 2500/2575 Air Brake: 2600/2675	2515/2545	Hydraulic brake: 2515/2545 Air Brake: 2615/2645	Hydraulic brake: 2550 Air Brake: 2650	Hydraulic brake: 2555 Air Brake: 2655	2695/2785	2730	2735	
GVW(kg)	Single Rear Tire: 4495 Dual Rear Tires: 5495		5495				5495				5495					
Safety																
ABS	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Exhaust Brake	○	○	○	○	●	●	●	●	●	●	●	●	●	●	●	
Power Steering	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Sound alert for handbrake not released	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Reminder of unfastened seat belt for driver	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
LED daytime running light	/	/	/	●	/	/	/	●	/	/	/	●	/	/	●	
Comfort																
Infotainment System (Bluetooth music / Bluetooth phone / USB music)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Multifunction steering wheel	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Air conditioning	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Central locking(manual)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Remote key	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Power windows	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
One-touch window lift--driver	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Remote key control glass one-touch lift	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Driver armrest	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Headlight delay off	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Driver overhead storage box	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
USB charging port	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Overhead storage box mounted USB port	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
12V Socket/ Power Port DC 12V Outlet	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Speed-sensitive automatic door locking	/	●	●	●	/	●	●	●	/	●	●	●	●	●	●	

●:Standard ○:Optional /:Not Available

All information is subject to change.

JMC

World-class supplier



Light Truck: Electronic control unit, sensors, oil pump, fuel injector
Pick Up/SUV: Fuel injector, ESP assembly



SUV (Diesel model): Intake camshaft



SUV/Pick Up: Transfer box assembly, transfer box ECU



SUV: Rear oxygen sensor



Light Van: ACU (Airbag control unit)



SUV: Tyre



Light Van (Gasoline model): Clutch, fuel pump plunger
SUV (Diesel model): Generator OAP belt pulley



SUV/Pick Up: Electronic gear shifter, automatic transmission,EPS assembly



Pick Up/ Light Van: Transmission



Light Truck: Exhaust pipe



SUV: Tyre



Light Van: Seats



Light Van: Clutch



Light Van (Gasoline model): Battery



Light Truck/SUV/Pick Up: Turbocharger



Light Truck: Pistons and piston rings



Light Truck: Combined instrument, A/C control panels, HVAC , condenser
Lighe Van: Combined instrument



SUV/Pick Up: Exhaust pipe system



Ford Global Quality Improvement Process



Ford Global Product Development System



- Exported to 110 countries and regions
- UN authorized supplier